

The Design Wall BOM - August

Fabric Requirements:

White Fabric:

- (1) 30 1/2" x 5 1/2" piece
- (1) 5 1/2" squares
- (1) 10 1/2" x 5 1/2" piece
- (24) 3 1/2" squares

Dark Grey Fabric:

- (12) 6" x 3 1/2" piece

Green Fabric:

- (6) 3 3/8" square
- (12) 3" squares

Black Fabric:

- (6) 3 3/8" squares
- (24) 2 1/4" x 4 1/4" pieces

Yellow Fabric:



- (6) 5 1/2" squares

*Light Fusible Interfacing:

- 1/2" yard



Green/Black Half Square Triangles: (make 12 units)

Place one 3 3/8" black square with a 3 3/8" green square. Mark a diagonal line (corner to corner) on the green square. Sew 1/4" away from the drawn line on each side. Use a rotary cutter and ruler to cut on the drawn line. Press the seams towards the black fabric.



Make 12 units. Unit final size: 3" square.


Piece the block following the diagram below.




Make 6 units. Unit final size: 5 1/2" square.

Assembly:

Piece the units following the diagram below.

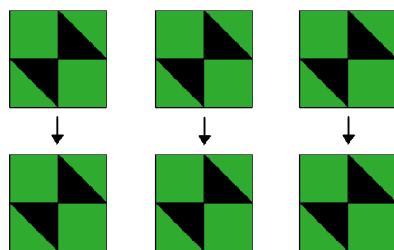

Piece the 6 units together.

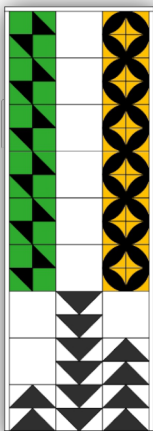

The Design Wall BOM - August

White and Dark Grey Flying Geese: (make 12 units)


Using the "Flipping Method" again, align one 3 1/2" white square with a 6" x 3 1/2" dark grey piece. Mark a diagonal line on the white square from corner to corner. Sew on the marked line. Trim the sew allowances to 1/4" as shown. Flip the result triangle and press. Repeat the process on the other side. Trim the unit to 5 1/2" x 3". (See page 6)



Make 12 units.

Assembly:



Using the 10 1/2" x 5 1/2" white unit and the 5 1/2" square, piece the block following the diagram below.

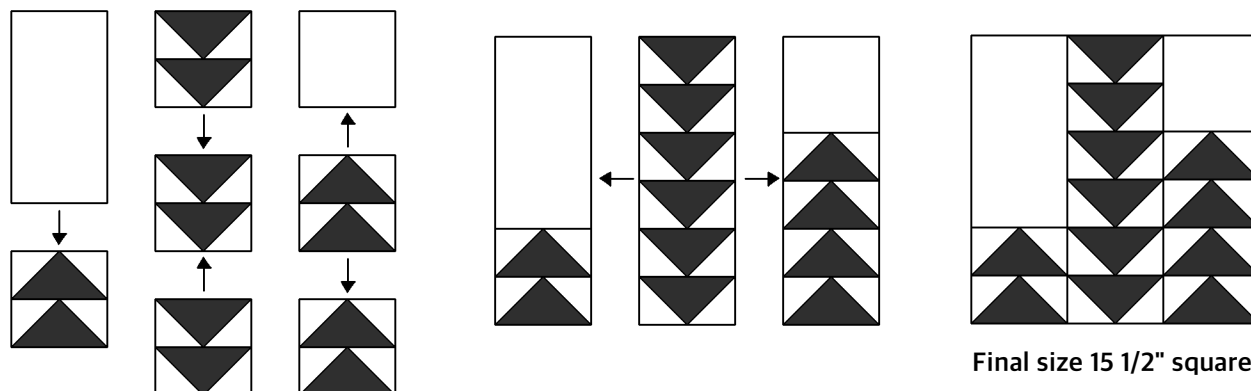


Final size 15 1/2" square.

Yellow and Black "Orange Peel" machine applique blocks:

Use the "Orange Peel" template below to cut the 2 1/4" x 4 1/4" black fabric pieces, and also the light fusible interfacing. Place one black fabric peel with a light fusible interfacing peel (**make sure the sticky side of the interfacing is facing down, touching the black fabric**), pin in place and stitch 1/4" all the way around the peel. Clip the excess of fabric from the corners and around the curves. Make a 1" cut only at the interfacing and turn the peel inside out. Fold one 5 1/2" yellow square in fourth and press to "mark" the guidelines for positioning the peel.

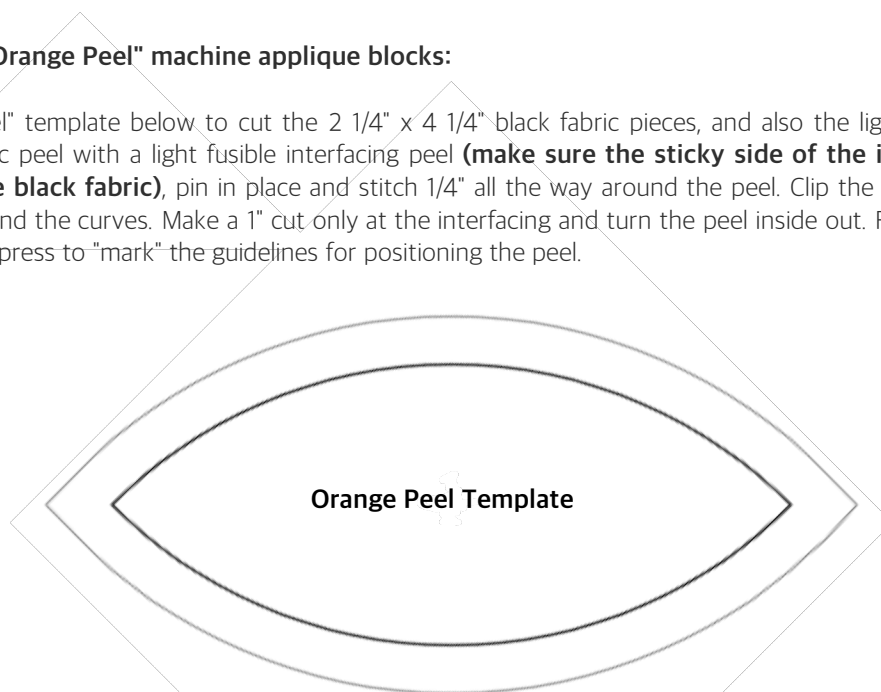


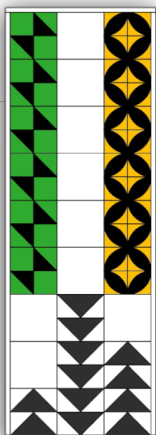

The Design Wall BOM - August


Assembly:

Follow the diagram below.

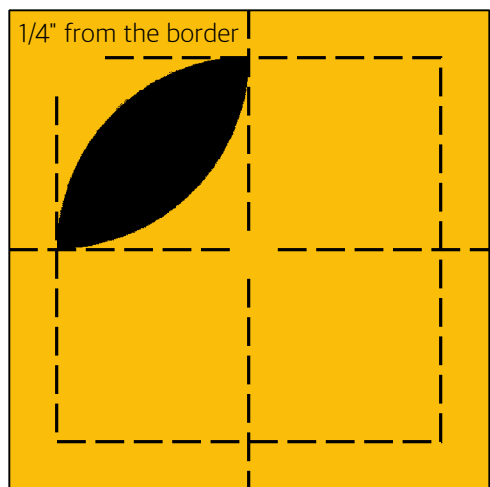

Repeat with the other 3 peels, pin in place and press. Now the sticky part of the fusible interfacing will keep the peels on the right place for invisible machine applique.

Tip: for invisible machine applique, choose one of the "blind hem stitch" options from your machine (on my Bernina is #1331), change the stitch length to 0.30 and width to 0.7, move the needle all across to the right and use the edges of your machine foot as a guide.

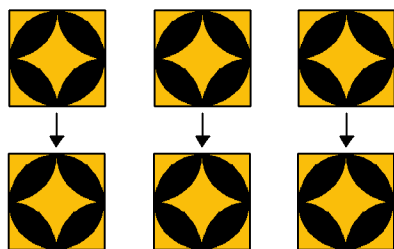

Piece the blocks in pairs than in a column.



August block assembly:

Using the 30 1/2" x 5 1/2" white fabric unit, piece the block following the diagram below.

